
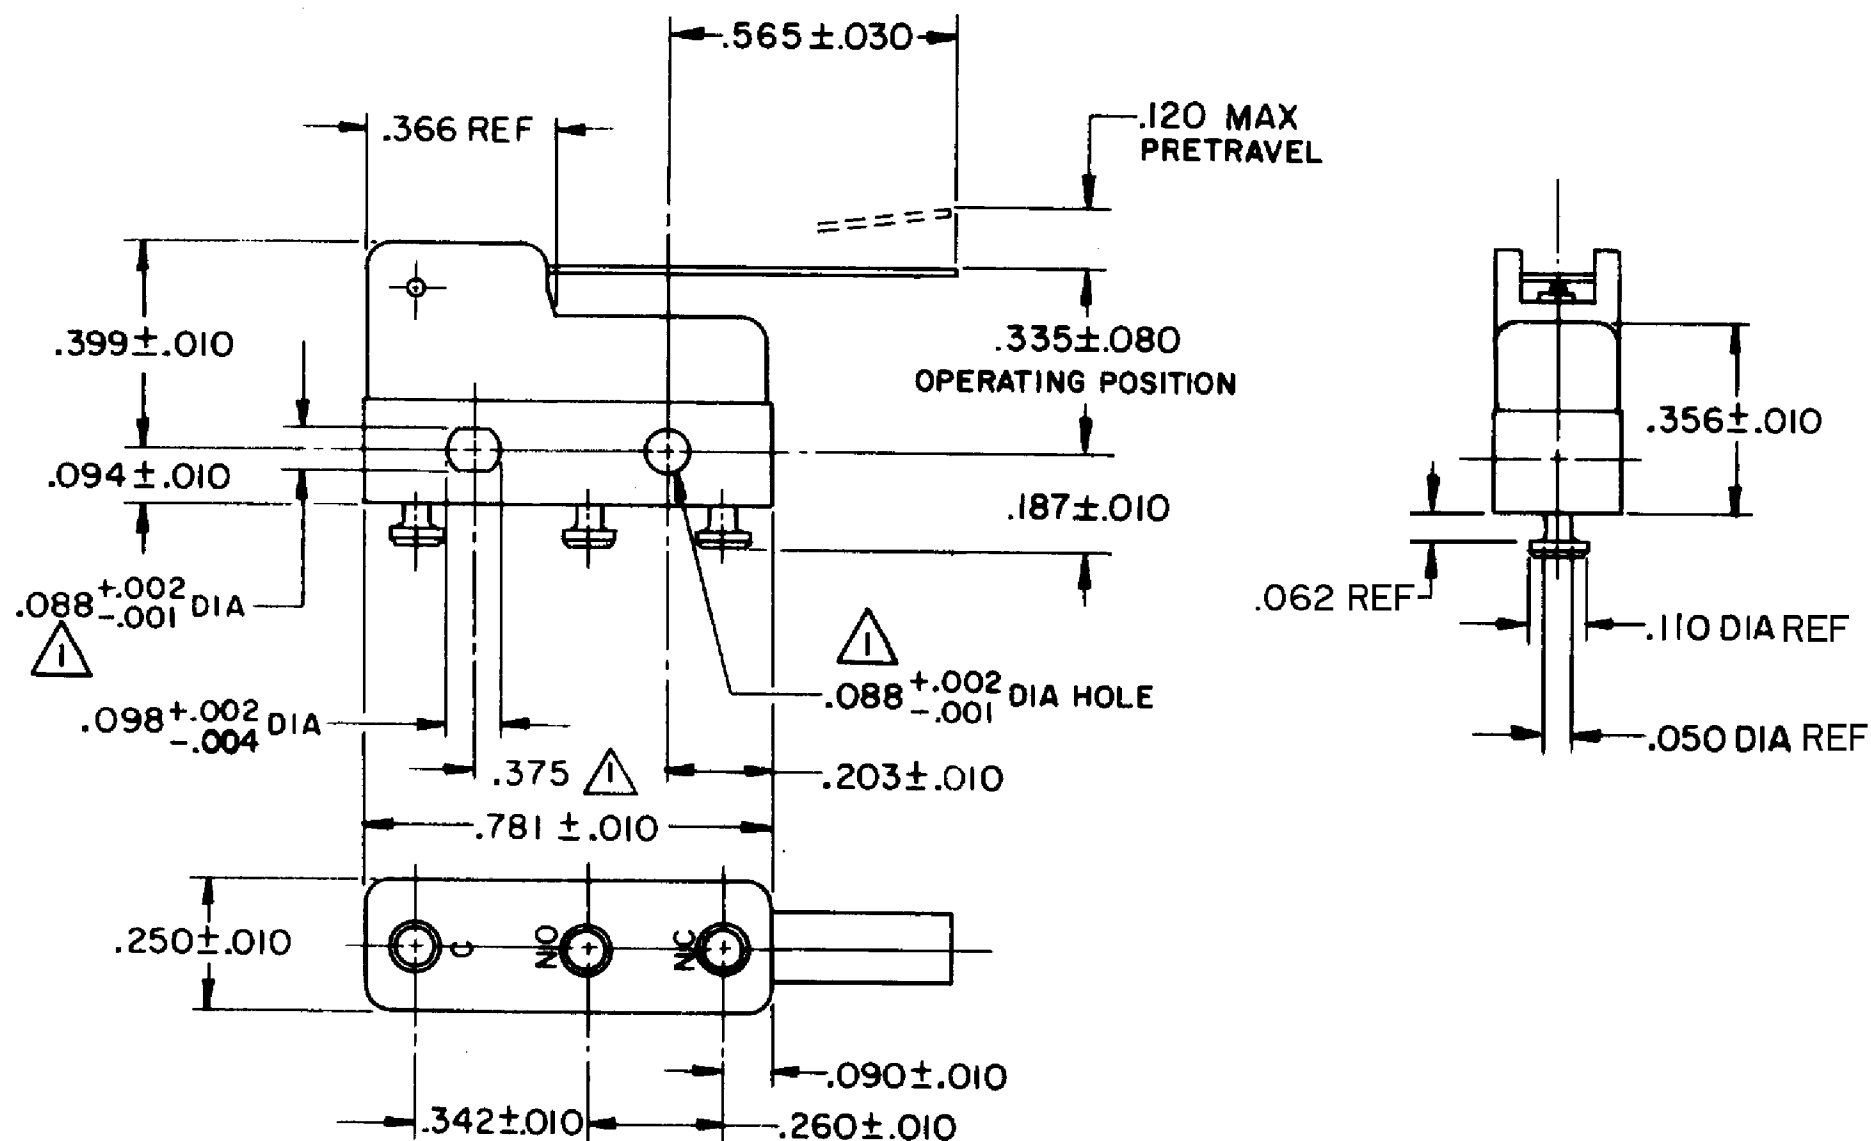
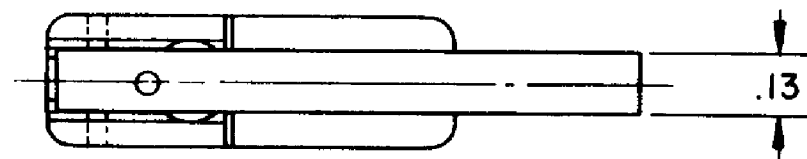


REV	DOCUMENT	CHANGED BY	CHECK
7	0055407	KNR 18AUG09	CMH



MOUNTING HOLES WILL ACCEPT PINS OR SCREWS
OF .087 MAX DIA ON .375 $\pm$.002 CENTERS
SWITCH WILL WITHSTAND TEMPERATURE OF 250°F
TERMINALS ARE PLATED FOR SOLDERING

RELEASE NO.	SR-11750
REPLACES	

CHARACTERISTICS		ELECTRICAL DATA				DESIGN UNITS: INCH TOLERANCES UNLESS NOTED: NO PLACE X ± ONE PLACE .X ± .030 TWO PLACE .XX ± .015 THREE PLACE .XXX ± .005 FOUR PLACE .XXXX ± ANGLES ± THIRD ANGLE PROJECTION 				DRAWN	VK	20FEB 08		Honeywell				
OPERATING FORCE — — 30 GRAM MAX		CONTACT ARRANGEMENT S P D T								CHECK	RJ	20FEB 08						
RELEASE FORCE— — — — 5 GRAM MIN		30 VOLTS DC RATING				THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.								TITLE SWITCH - BASIC				
		SEA LEVEL 50,000 FT																
DIFFERENTIAL TRAVEL— — — .027 MAX		INDUCTIVE		3 AMP 2.5 AMP		INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY								SIZE	TYPE	DRAWING NAME		REV
OVERTRAVEL — — — — — .026 MIN		RESISTIVE		5 AMP 5 AMP										B	I	311SM2-T		7
		MAXIMUM INRUSH 24 AMP												SCALE	NONE	WEIGHT .006 LB MAX	SHEET 1 OF 1	
		APPROVALS	KEMA, CE	5A, 250V ~ T85 1E4			UL, CSA	5A, 250 VAC ~			BRAND L4							
			UL	4A, 24VAC RES		BRAND FIG 327												