


HONEYWELL
PART NUMBER

311SM5-T

PRODUCT CODE

TZA1300

REV	DOCUMENT	CHANGED BY	CHECK
5	0038113	PRS 12JUN08	BLR

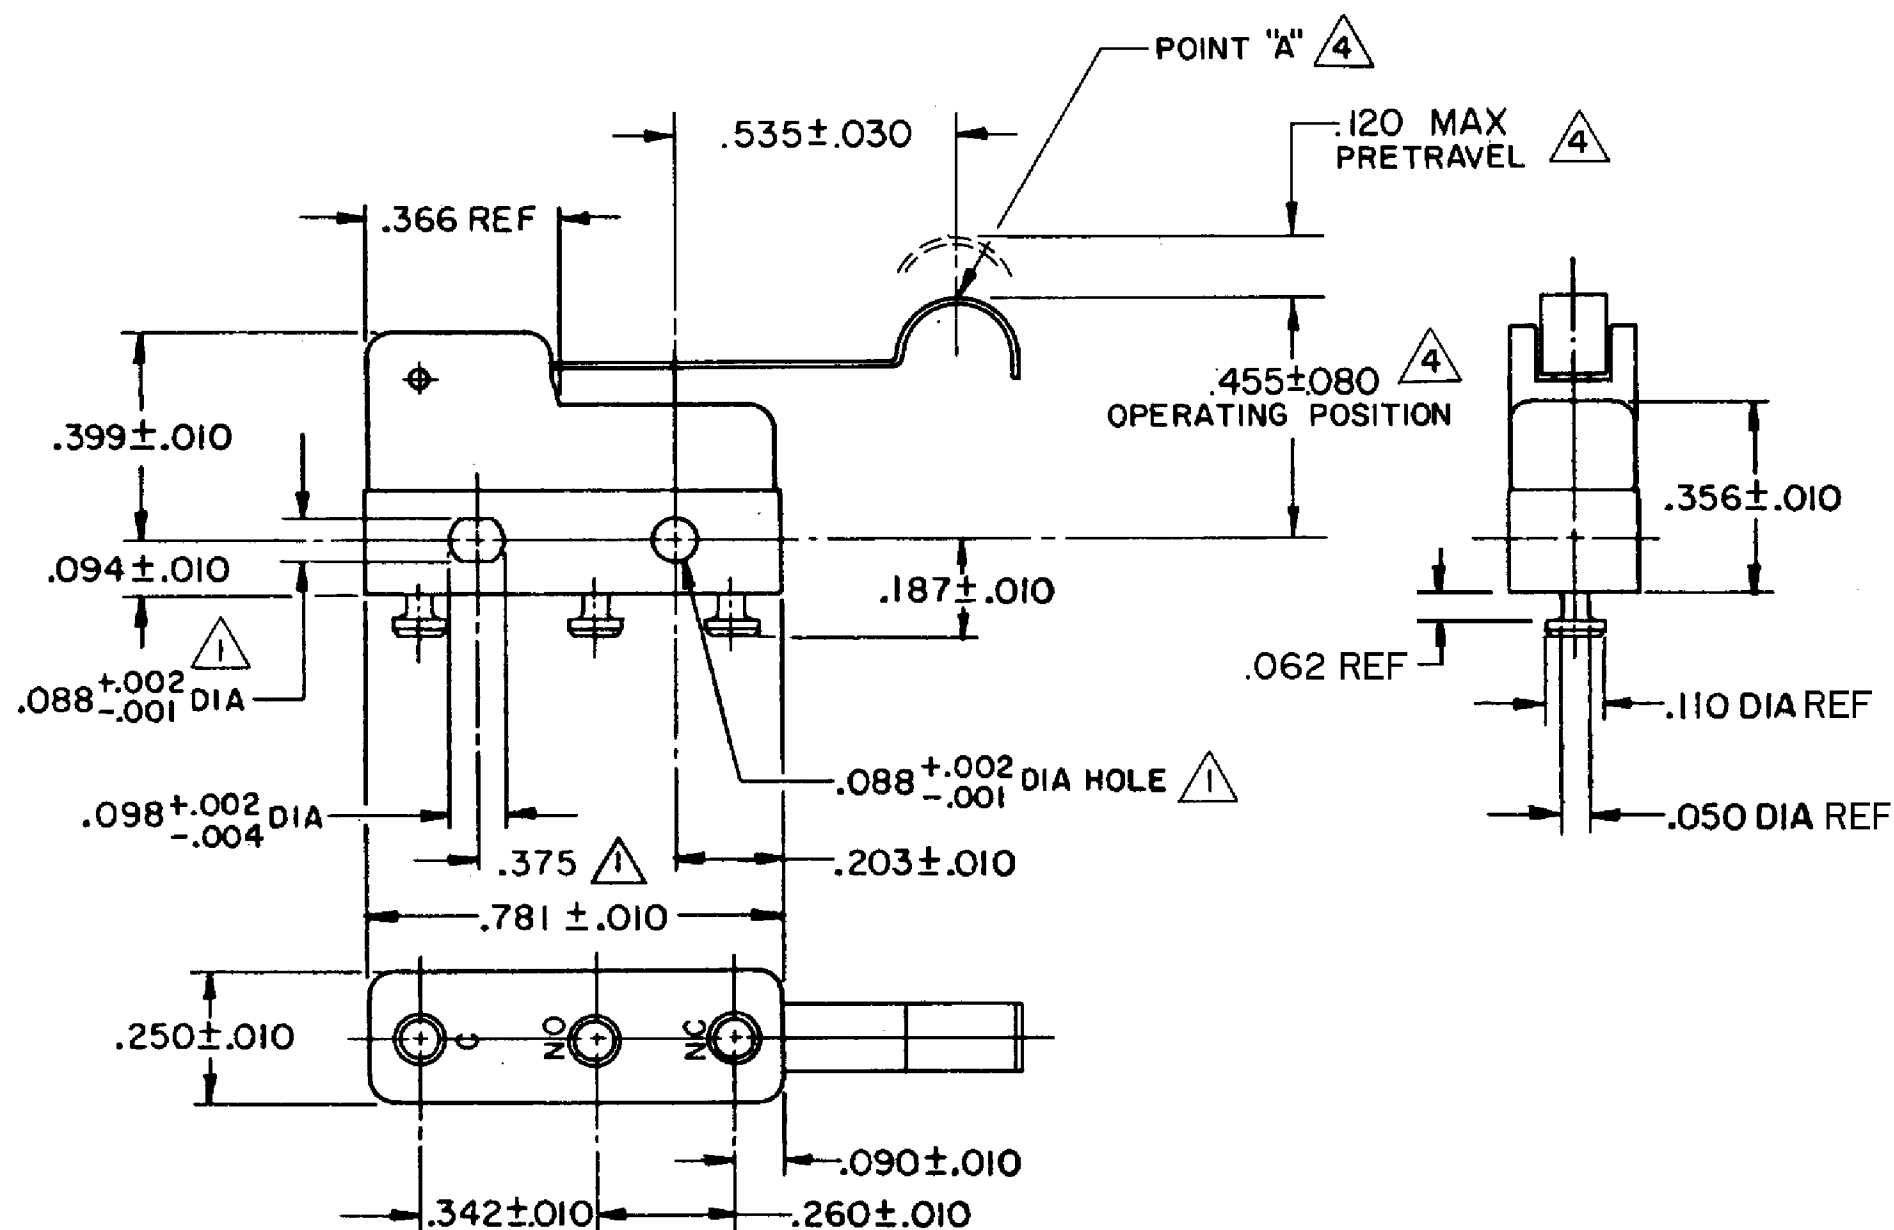

- NOTE -
- 1 MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .087 MAX DIA ON .375 ± .002 CENTERS
 - 2 SWITCH WILL WITHSTAND TEMPERATURE OF 250°F
 - 3 TERMINALS ARE PLATED FOR SOLDERING
 - 4 CHARACTERISTICS TAKEN AT POINT "A"

RELEASE NO.
SR - 11750REPLACES
-

CHARACTERISTICS 4

OPERATING FORCE -- 30 GRAM MAX

RELEASE FORCE -- 5 GRAM MIN

DIFFERENTIAL TRAVEL -- .027 MAX

OVERTRAVEL -- .026 MIN

ELECTRICAL DATA			
CONTACT ARRANGEMENT SPDT			
30 VOLTS DC RATING			
	SEA LEVEL	50,000 FT	
INDUCTIVE	3 AMP	2.5 AMP	
RESISTIVE	5 AMP	5 AMP	
MAXIMUM INRUSH 24 AMP			
APPROVALS	KEMA, CE	5A, 250V ~ T85 1E4	CE
	UL, CSA	5A, 250 VAC ~	UL

DESIGN UNITS: INCH			
TOLERANCES UNLESS NOTED:			
NO PLACE	X	±	-
ONE PLACE	.X	±	0.030
TWO PLACE	.XX	±	0.015
THREE PLACE	.XXX	±	0.005
FOUR PLACE	.XXXX	±	-
ANGLES		±	-
THIRD ANGLE PROJECTION			

DRAWN	VK	05 NOV 07
CHECK	RJ	05 NOV 07
THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.		
INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY		
RASTER		

Honeywell			
TITLE SWITCH - BASIC			
SIZE B	TYPE I	DRAWING NAME 311SM5-T	REV 5
SCALE -	WEIGHT .006 LB MAX	SHEET 1 OF 1	