


HONEYWELL
PART NUMBER

311SM3-H58

PRODUCT CODE
TZA1185

REV	DOCUMENT	CHANGED BY	CHECK
9	0038113	PRS 12JUN08	BLR

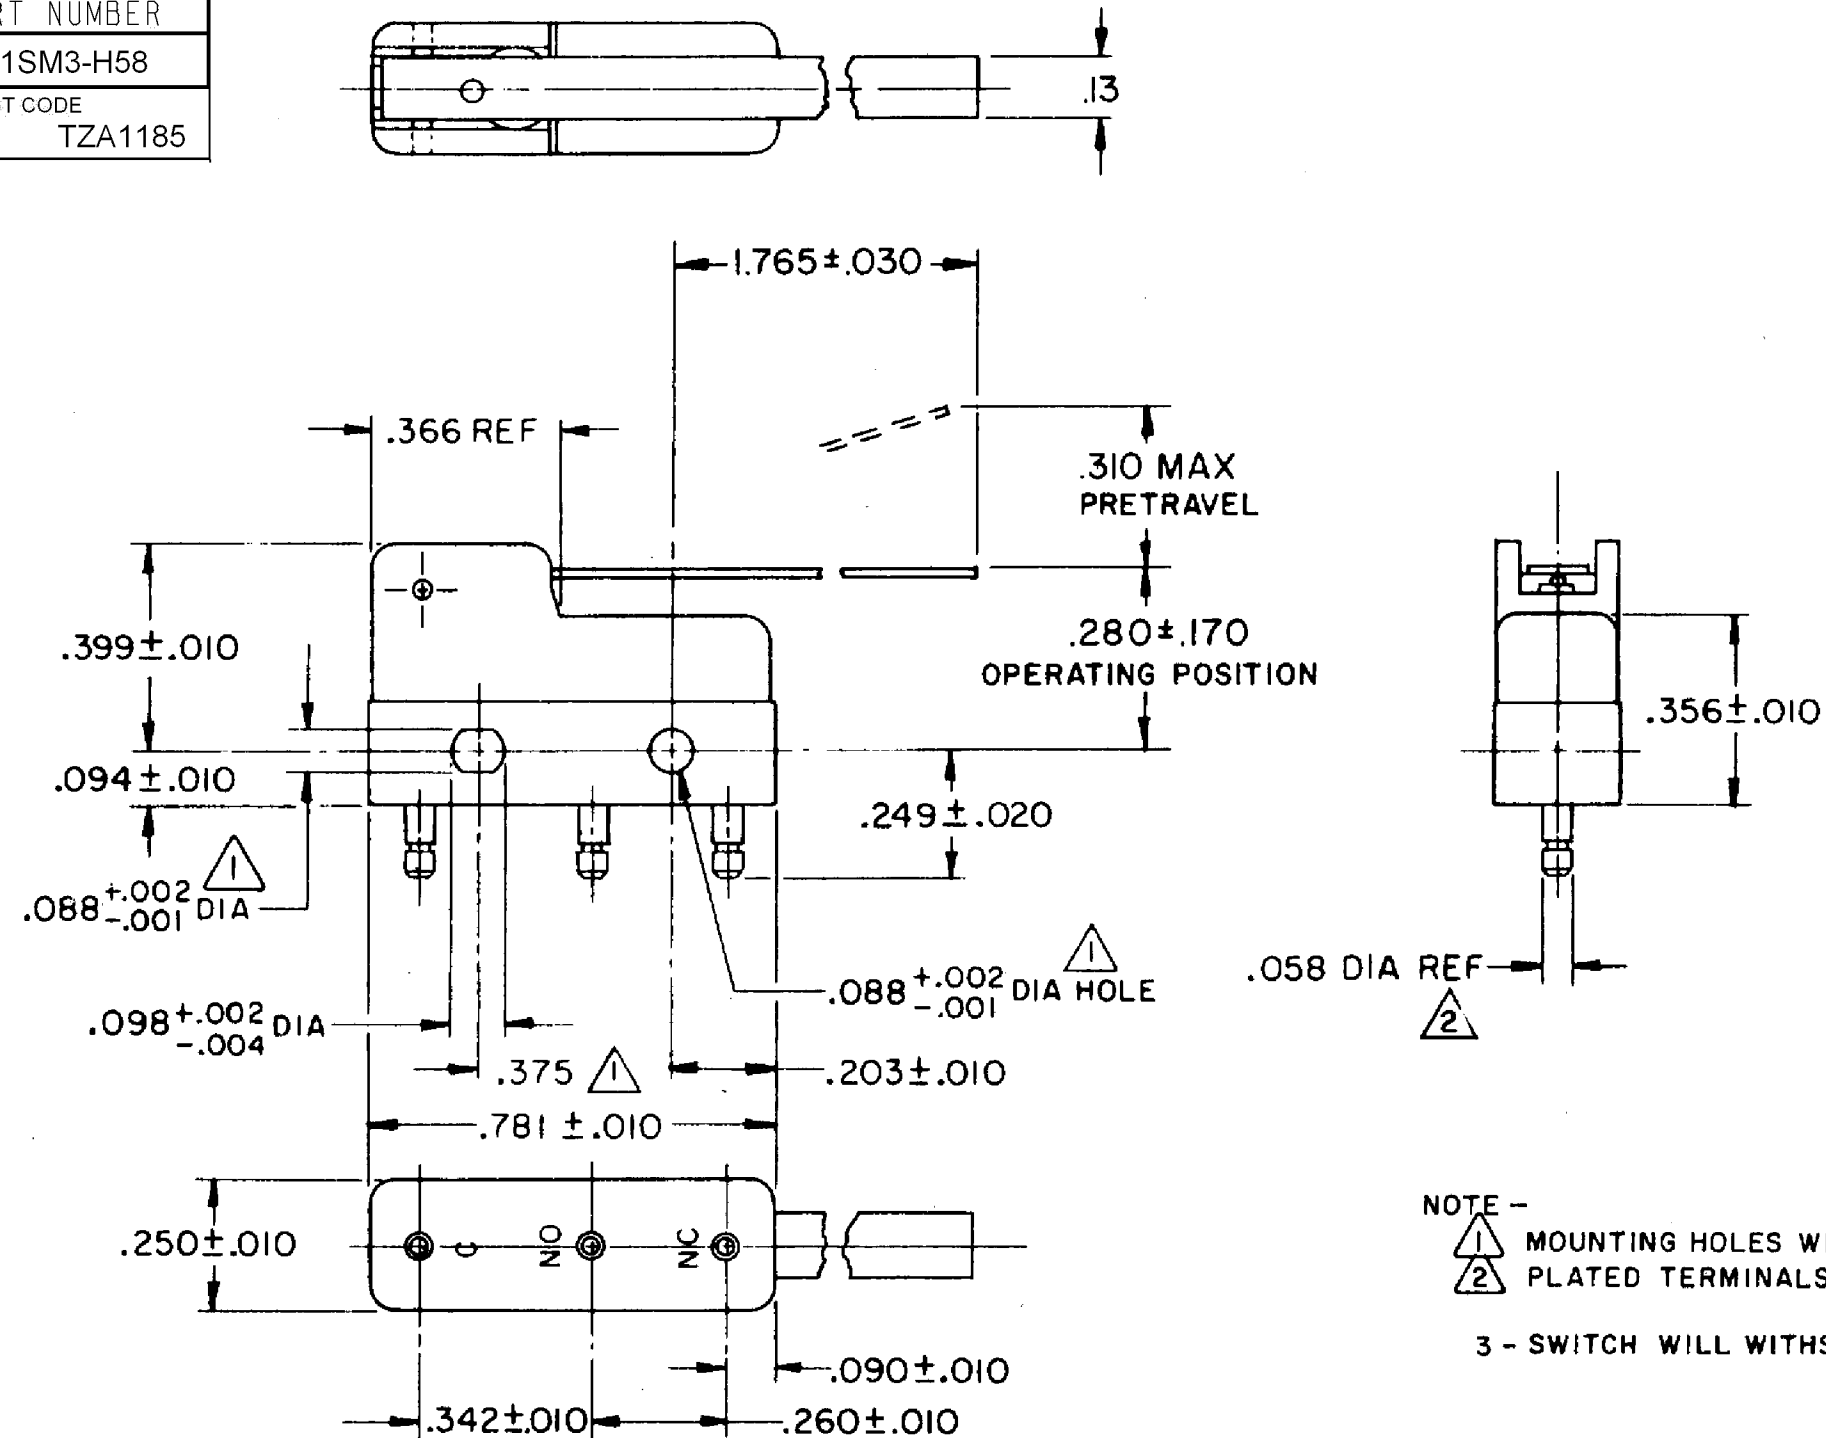

NOTE -



1 MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .087 MAX DIA ON .375 ± .002 CENTERS
2 PLATED TERMINALS WILL ACCEPT "AMP INC" .058 DIA PIN RECEPTACLES.

3 - SWITCH WILL WITHSTAND TEMPERATURE OF 250° F

RELEASE NO.
PR - 3923

REPLACES

CHARACTERISTICS

OPERATING FORCE - - 15 GRAM MAX

RELEASE FORCE - - - - 2 GRAM MIN

DIFFERENTIAL TRAVEL - - - .110 MAX

OVERTRAVEL - - - - - .057 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
SPDT

30 VOLTS DC RATING

	SEA LEVEL	50,000 FT
INDUCTIVE	3 AMP	2.5 AMP
RESISTIVE	5 AMP	5 AMP

MAXIMUM INRUSH 24 AMP

APPROVALS	KEMA, CE	5A, 250V ~ T85 1E4	CE
	UL, CSA	5A, 250 VAC ~	BRAND L4

DESIGN UNITS: INCH

TOLERANCES UNLESS NOTED:

NO PLACE	X	±	-
ONE PLACE	.X	±	0.030
TWO PLACE	.XX	±	0.015
THREE PLACE	.XXX	±	0.005
FOUR PLACE	.XXXX	±	-
ANGLES		±	-

THIRD ANGLE PROJECTION



DRAWN

VK

05 NOV 07

CHECK

RJ

05 NOV 07

THIS DRAWING COVERS A PROPRIETARY ITEM
AND IS THE PROPERTY OF HONEYWELL.
THIS DRAWING IS NOT TO BE COPIED OR USED
WITHOUT THE PERMISSION OF HONEYWELL.

INTERPRET PER ANSI Y14.5M-1982
OTHER HONEYWELL ENGINEERING
STANDARDS MAY APPLY

RASTER

Honeywell

TITLE

SWITCH - BASIC

SIZE

B

TYPE

I

DRAWING NAME

311SM3-H58

REV

9

SCALE

-

WEIGHT .006 LB MAX

SHEET 1 OF 1